


WEATHER ENCLOSED DIESEL GENERATORS

30-40 kW

3-YR / 3000 HR
LIMITED WARRANTY

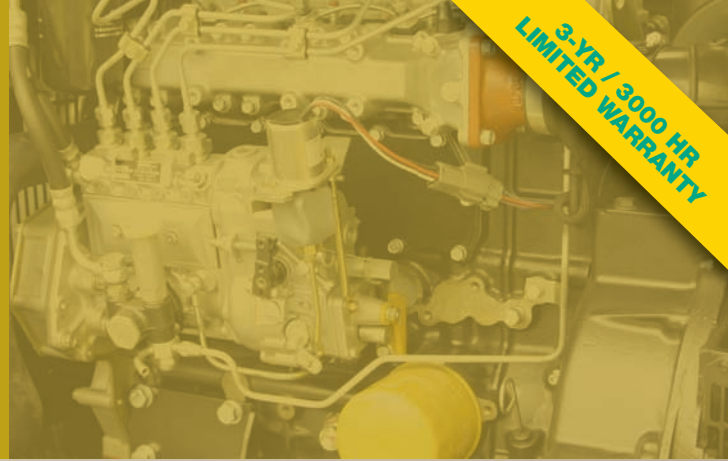

Built with the cleanest, most reliable diesel engines anywhere, **GPP** weather enclosed diesel generators combine superb quality with low up-front costs and low operating costs. A menu of basic options enables you to build your generator your way, so that you have what you need and you eliminate what you don't need. High quality plus low up-front cost makes you the winner. Affordable weather enclosed diesel generators – CLEAN, EFFICIENT, RELIABLE.

- EPA Tier 4 interim and CARB Compliant Engines
- Excellent Workmanship
- Excellent Value
- Superb Fuel Economy
- Powder Coated Aluminum Enclosures
- Optional 50 or 80 Gallon Fuel Tanks
- Optional Sound Attenuation
- Choice of Control Systems
- Exceptional Factory Service and Support with 3-year / 3000-hour Limited Warranty



*shown with optional
100 gallon fuel tank*

**EPA Tier 4
Interim
Compliant**



**Quality Built
DIESEL
GENERATORS**



**Superior Power. Premium Design.
Strong Support. Competitive Price.**

**WEATHER
ENCLOSED
DIESEL GENERATORS
30-40 kW**



shown with optional
100 gallon fuel tank



AVAILABLE OPTIONS

- Sound Attenuation
- Battery
- Battery Trickle Charger
- Breaker Kit
- Fuel Filter/Water Separator
- Block Heater
- 50 or 100 Gallon Double Wall Fuel Tank

MODEL	GPP30-WE	GPP40-WE
GENERATOR		
GENERATOR TYPE	Revolving Field Brushless AC	
EXCITATION/ NUMBER OF POLES	4 Poles	4 Poles
STANDBY OUTPUT, 3 PHASE	30kW	37kW
CONTINUOUS OUTPUT, 3 PHASE	27kW	35kW
CONTINUOUS OUTPUT 1 PHASE	27kW	34kW
VOLTAGE, 1 PHASE	120/240	120/240
VOLTAGE, 3 PHASE	120/208, 120/240, 277/480	120/208, 120/240, 277/480
AMPS 1 PHASE, 120/240V	250/125	334/167
AMPS 3 PHASE, 120/208V	104	139
AMPS 3 PHASE, 120/240V	90	120
AMPS 3 PHASE, 277/480V	45	60
FREQUENCY	60Hz	60Hz
VOLTAGE REG. (no load to full load)	1%	1%
RATED SPEED, 60HZ	1800rpm	1800rpm
WINDING	12-wire and 4-wire available	
POWER FACTOR, 1 PHASE	1.0	1.0
POWER FACTOR, 3 PHASE	0.8	0.8
DIESEL ENGINE		
MAKE, MODEL AND TYPE	Mitsubishi S4S, 4 Cylinder	Mitsubishi S4SDT, 4 Cyl.
STARTING SYSTEM	Electric	Electric
DESIGN	4 Cycle	4 Cycle
	Liquid Cooled	Liquid Cooled/Turbo
	Indirect Injection	Indirect Injection
	Glow Plug Assist	Glow Plug Assist
DISPLACEMENT	3.3L (203.2 cu. in.)	3.3L (203.2 cu. in.)
BORE X STROKE	94x120 mm	94x120 mm
CONTINUOUS RATED OUTPUT	45hp @1800 rpm	58hp @1800 rpm
FUEL CONSUMPTION FULL LOAD	2.7 gph	2.8 gph
FUEL CONSUMPTION 3/4 LOAD	2.0 gph	2.1 gph
FUEL CONSUMPTION 1/2 LOAD	1.4 gph	1.5 gph
FUEL CONSUMPTION 1/4 LOAD	0.8 gph	0.9 gph
TOTAL COOLANT CAPACITY	5.5L (1.45 gal.)	5.5L (1.45 gal.)
TOTAL OIL CAPACITY	10.0L (2.64gal.)	10.0L (2.64gal.)
PHYSICAL CHARACTERISTICS		
DIMENSIONS	80" x 36" x 45"	80" x 36" x 45"
UNIT DRY WEIGHT	1245 lbs.	1250 lbs
ENCLOSURE TYPE	Aluminum	Aluminum

METERS AND CONTROLS

- TYPE 1: Light Panel with Oil Level and Water Temperature Shutdown
- TYPE 2: Autostart Panel with Hourmeter and Oil Level and Water Temp. Shutdown
- TYPE 4: Deluxe Generator Gauges with Voltmeter, Frequency Meter and Engine Gauges
- TYPE 5: Digital Auto Start

Features and specifications are subject to change without notice.
© Copyright 2012, Mack Boring & Parts Company, Inc.
GLOBAL POWER PRODUCTS is a registered trademark of Mack Boring & Parts Company.



Div. of Mack Boring & Parts Co.

**America's
Premier Value
in Diesel
Generators**



OPEN FRAME
8-100 kW



ENCLOSED
12-100 kW



KEEL COOLED
20-60 kW



CUSTOM
DESIGN