

PSS8B4W

PSS12H4W

PSS15B4W



Conforms to
UL STD 2200

Performance Data

	LP			NG		
	kW	kVa	Amps	kW	kVa	Amps
PSS8B4W	8.4	8.4	35	7.6	7.6	32
PSS12H4W	12	12	50	10	10	41
PSS15B4W	15	15	62.5	12	12	50

Notes: (1) Derate 3.5% per 1,000 feet elevation above sea level.

Features and Benefits

Manufacturer

- Winco has over 85 years of generator experience.
- Winco exclusively manufactures generators. We focus our resources on developing the highest quality products available at the best long term value.
- Manufactured in the USA.

Engines

- Commercial grade V-twin engines are standard in all models for smooth clean power.
- Pressurized lubrication system with spin-on oil filter.
- Generator exercises at operating speed to run complete diagnostics on the system.
- Converting between natural gas and LP gas is simple and easily done in the field.

Installation

- Generator design allows side wall or sub-base underground connections.
- Easy to use AC and DC terminal blocks make connections quick and simple.

Weatherproof Enclosure


- Quiet neighbor-friendly operation.
- Fire-retardant sound absorbing foam.
- Galvaneal steel weatherproof housings are strong and durable at all temperatures.
- All panels are lockable and identically keyed.
- Side panels allow access to the generator for maintenance without having to remove or open the roof exposing the internal components to the elements.
- Unique three chamber housing design (see drawing to right) increases air flow while reducing noise and heat.
- Small compact designs are attractive and easily blend in with landscaping.

Additional Features

- Included battery charger prevents sulfation increasing the reliability and service life of the battery. The .75A multi-stage charger always charges at the proper rate preventing battery damage.
- Fast automatic response to power outages with optional transfer switch restores power in less than 30 seconds.

Safety Features

- Complete safety shutdowns including high oil temp, low oil pressure, low frequency and low voltage protect the generator and load.
- Over current protection by high quality thermal-magnetic Square D breaker with Visi-Trip and 1/60 second reaction time.
- Double disc fuel solenoids ensure positive fuel shut-off.
- Steel fuel inlet is more durable than aluminum preventing dangerous cracks.
- CSA approved and ETL listed to UL Standard 2200.
- All models are EPA/CARB compliant.

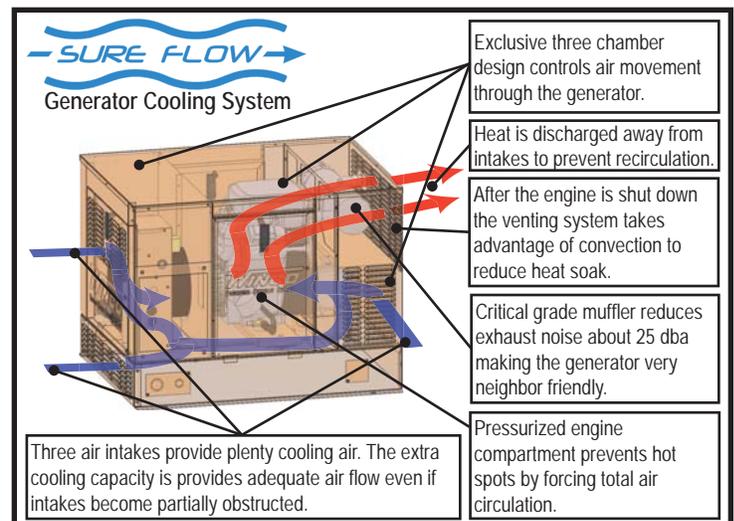

Specifications

Engine Specifications			
	PSS8B4W	PSS12H4W	PSS15B4W
Make	B&S	Honda	B&S
Model	Vanguard	GX690	Vanguard
Displacement	570 cc/OHV	688 cc/OHV	895 cc/OHV
Cylinders	V-Twin		
Cylinder Sleeves	Cast Iron		
Lubrication	Forced with Spin-On Filter		
Ignition	Electronic		
Engine Speed	3600		
Governor	Mechanical		
Regulation	+/-1.8 hz Steady State		
Fuel	LP/NG Field Selectable		
Exhaust	Critical Grade, Glass-pack		
Low Oil Pressure	Shutdown		
High Oil Temp	Shutdown		
EPA/CARB	Yes	Yes	Yes

Electrical Specifications	
Output	120/240V Single Phase
Design	Rotating Field
Poles	2
Voltage Regulation	+/-5%
Insulation	Class H
Temperature Rise	125°/40° C
Windings	100% Copper
Bearings	Weatherproof Maintenance Free
Harmonic Distortion	<5%
Rotor	2/3 Pitch
Load Acceptance	100% Rating/Single Step
DC System Voltage	12V
DC Alternator	Engine Mounted
Battery Rack/Cable	Included
Battery Charger	Included (4 Stage)
Start Battery	Group 26, 500 CCA (Not included)



Fuel Requirements				
	Load	PSS8B4W	PSS12H4W	PSS15B4W
Natural Gas	100%	132	195	260
LP Gas	50%	95	140	170
LP Gas	100%	1.6	2.2	2.96
	50%	1.0	1.4	1.75
Flow Rate NG (BTU/HR)		132,000	190,000	260,000
Flow Rate LP (BTU/HR)		158,760	194,000	272,160

Notes: (1) Natural gas measured in ft³/hr. (2) LP gas measured in gal/hr. (3) Requires 7-11" water column (4-6 oz) fuel pressure. (4) Flow rates are at full load. (5) 3/4" Fuel Inlet.

Fuel Tank/Line Sizing			
	PSS8B4W	PSS12H4W	PSS15B4W
60° F (16° C)	150 Gallon	150 Gallon	150 Gallon
32° F (0° C)	150 Gallon	250 Gallon	250 Gallon
0° F (-18° C)	250 Gallon	500 Gallon	500 Gallon
-20° F (-29° C)	500 Gallon	1000 Gallon	1000 Gallon
Feet	Pipe Size (Add 3' for each elbow. Do not use 'street ells.)		
Up to 25'	3/4" Pipe		
25'-100'	1" Pipe		
Over 100'	Use a 2 regulator system.		

Model Sound Levels								
	No Load				Full Load			
	L	R	F	B	L	R	F	B
PSS8B4W	63.2	64.4	66.4	63.8	64.9	65.3	68.5	65.3
PSS12H4W	64.5	62.1	68.2	66.1	67.5	64.3	69.5	66.1
PSS15B4W	Test Results Pending							

Notes: (1) All measurements are in db(a). (2) Tested at 7 meters (23 ft.).



Dimensional Data				
	L	W	H	Weight
PSS8B4W	32 1/2"	29 3/4"	27 3/8"	385 lbs
PSS12H4W	40 11/16"	31 3/4"	30 7/8"	530 lbs
PSS15B4W	48 3/16"	32 3/4"	34 3/8"	760 lbs

Control Options

Winco Air-Cooled Packaged Standby Systems are available with both 4-wire and 2-wire control modules. The choice of controllers give you the flexibility to effectively meet any application's requirements without compromise.

4-Wire Start Module

The Winco 4-wire control module is designed to work with the ASCO 165 4-wire transfer switches. All starting controls including start contacts, fuel solenoid contacts and time delays are built into the transfer switch. If a fault occurs, the transfer switch will shut down the system and display diagnostic code. This system is ideal for most residential standby installations.

ASCO 165 Automatic Transfer Switches

- Perfect for residential/light commercial applications.
- 3-second time delay prevents starting the generator for momentary power outages.
- 15-second delay before transferring to emergency power allows the generator to stabilize after starting.
- Electrical power is restored in less than 30 seconds.
- 5-minute time delay on retransfer allows the utility source to stabilize prior to transferring the load back to utility.
- 1-minute unloaded running time delay allows the engine and generator to cool down before shutdown.
- Available in 4-wire or 2-wire configurations.
- True double-throw contacts with inherent mechanical interlocking.
- Diagnostic indicators aid in troubleshooting.
- Listed to UL 1008

***Asco 185 and 300 Series standard and service entrance rated switches also available. (2-Wire Start Only)

2-Wire Start Module

The Winco 2-wire control module starts the generator when a dry contact closes making it compatible with most transfer switches and other starting devices. All generator start and shutdown functions are controlled by the 2-wire control module. The module provides detailed operating and diagnostic information through its digital display. This module is recommended for applications with compatible transfer switches, solar, pump and independent operation.



Controller Features

	4-Wire	2-Wire
Fail To Start	X	X
Fail To Stop	-	X
Low Oil Pressure	X(1)	X
High Engine Oil Temp.	X(1)	X
Under Frequency/Speed	X	X
Over Frequency/Speed	X	X
Low Voltage	X	X
High Voltage	X	X
Battery Over/Under Voltage	-	X
Digital Display (RPM, V, HZ, Bat. V)	-	X

Notes: (1) Control displays a generic fault code.

Accessories

Start System

- 4-Wire (Standard)
- 2-Wire

Automatic Transfer Switch (Select One Option/Column)

- ASCO 165
 - 100A NEMA 1 4-Wire Start
 - 200A NEMA 3R 2-Wire Start
- ASCO 185 (2-Wire Start Only)
 - 100A NEMA 1 Service Entrance Rated
 - 200A NEMA 3R
 - 400A
- ASCO 300 _____ Amps _____ Enclosure

Cold Weather

- Engine Heater w/Thermostat
- Battery Heater

Other

- 3/4" Vapor Fuel Stainer

Presented By: