

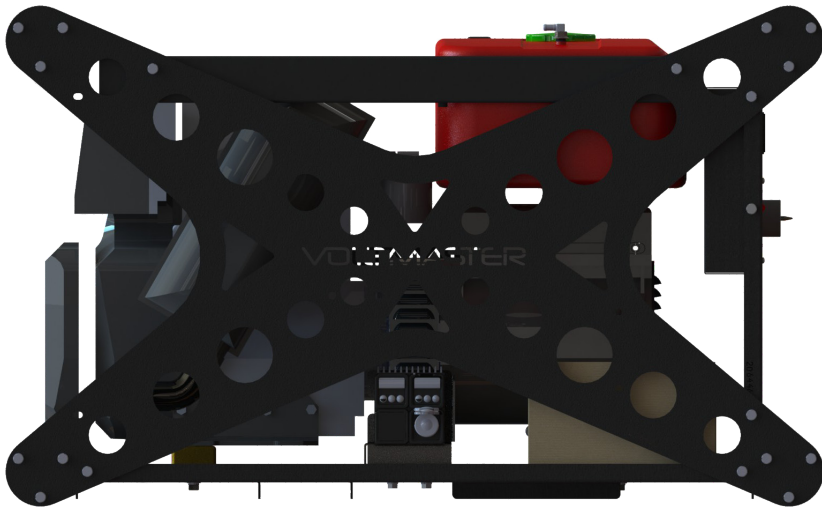


XTP120-208

THREE-PHASE PORTABLE GENERATOR

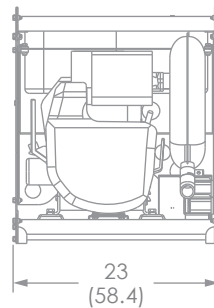

- Individual circuit breakers
- Kohler® engine
- Electric start/recoil start
- Automatic low-oil shutdown
- Hour meter
- Heavy-duty frame
- Steel fuel tank
- Extended run time
- Easy maintenance
- 2-year warranty

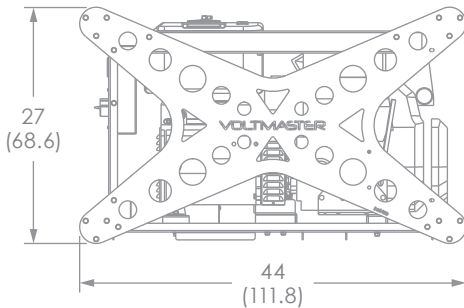

watts, max.	12,000
watts, rated	15,000
voltage	208/240
amperage	41/35
receptacles	(1) 120V/20A GFI duplex (1) 250V/50A straight-blade
fuel capacity	10 gal. (37.9L)
run time	10 hrs. @ 50% load
weight	380 lbs. (172.4kg)

All information in this document is subject to change without notice. Voltmaster is a Wanco brand. X-gen is a trademark and Voltmaster and Wanco are registered trademarks of Wanco Inc. All other trademarks are property of their respective owners.

Copyright © 2012 Wanco Inc. All rights reserved. 10.2012

VOLTMASTER

800-730-3927
WWW.XGEN.ME